



netis®

Easy Network, Trustable

Wired ADSL2+ Modem Router

DL4201

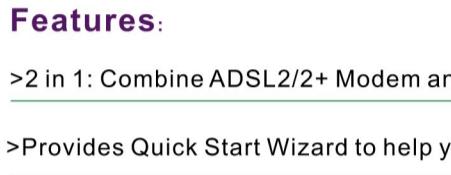

Features:

>2 in 1: Combine ADSL2/2+ Modem and Router in a single device

>Provides Quick Start Wizard to help you set up your network in Minutes

>Slim body design. Idea for home and office use

>LEDs indicate port activity

Brief:

The netis DL4201 Wired ADSL2+ Modem Router is a high performance modem router that provides a full rate of ADSL2+ standard. It is a 2 in 1 device that combines the function of a high-speed DSL modem and a one-Port 10/100Mbps router. With the built-in Quick Start Wizard, you can easily create a secure and high-speed wired network to share files, music, photos, and printers with multiple computers.

www.netis-systems.com

Wired ADSL2+ Modem Router

DL4201

Specification:

Hardware			
Interface	1 * 10/100M Auto MDI/MDIX RJ45 1 * RJ11		
LED	Internet ADSL LAN Power		
Power Supply	DC 5V/800mA(Output)		
Dimensions (L x W x H)	72x 69 x 25mm		
Software			
Standards	IEEE 802.3; IEEE 802.3u		
Data Rate	Downstream: Up to 24Mbps; Upstream: Up to 1Mbps		
ADSL Feature	Full-rate ANSI T1.413 Issue 2 ITU-T G.992.1(G.DMT); ITU-T G.992.2(G.Lite) ITU-T G.992.3; ITU-T G .992.5; ITU-T K.2.1		
ATM / PPP Protocols	ATM Forum UNI3.1/4.0 PVC (up to 8PVCs); ATM Adaptation Layer Type 5 (AAL5); ATM QoS; Bridged and routed Ethernet encapsulation VC and LLC based multiplexing; PPP over ATM (RFC 2364); PPP over Ethernet (RFC2516) IPoA (RFC1577/2225)		
Main Features	DHCP, DHCP relay; VPN (PPTP, L2TP, IPSec) Pass-through; DNS Relay, DDNS; Virtual server, DMZ, ACL (Access Control List); UPnP NAT, Static Routing PVC/Ethernet Port Mapping IGMP Multicast, IGMP snooping V1/V2		
Management	Web Based Configuration (HTTP), Remote management, Telnet management, command Line Interface, TR-069, SNMP, Web Based Firmware Upgrade, CWMP (TR-069), Diagnostic Tools		
Others			
Certification	CE, FCC		
Environment	Operating Temperature: 0°C~40°C Operating Humidity: 10%~90% non-condensing	Storage Temperature: -40°C~70°C Storage Humidity: 5%~90% non-condensing	
Package	1 * DL4201 1 * Ethernet Cable	1 * Quick Installation Guide 2 * RJ11 cable	1 * Power Adapter 1 * Splitter

Topological Graph:

